



Top view




Right view

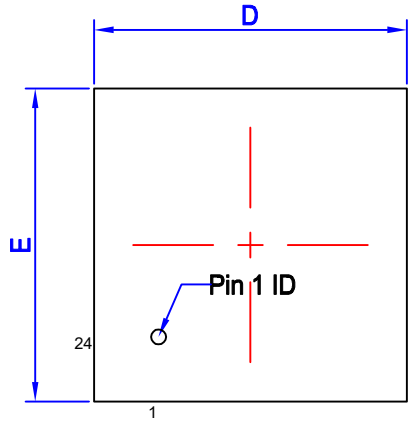

Bottom view

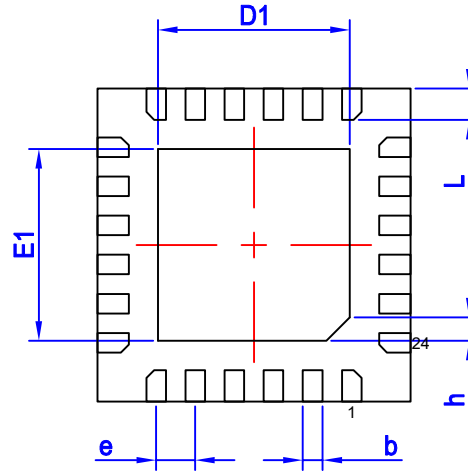



Front view



	SYMBOL	MIN	NOM	MAX
TOTAL THICKNESS	A	0.70	0.75	0.80
STAND OFF	A1	0.00	0.02	0.05
L/F THICKNESS	A2	0.203REF		
LEAD WIDTH	b	0.20	0.25	0.30
BODY SIZE X	D	3.90	4.00	4.10
EP SIZE X	D1	2.35	2.45	2.55
BODY SIZE Y	E	3.90	4.00	4.10
EP SIZE Y	E1	2.35	2.45	2.55
LEAD PITCH	e	0.50BSC		
LEAD LENGTH	L	0.35	0.40	0.45
CHAMFER	h	0.20	0.30	0.40
LF PAD SIZE	X	2.90	Y	2.90

注意:

1. 0.50QFN4x4-24-A-0.75封装产品图与0.50QFN4x4-24-0.75封装产品图区别为基岛尺寸 (D1和E1) 不同;
2. 与0.50QFN4x4-24L共用测试座。

A	首次发行			Cai Zexian	2021/10/06		
REV	DESCRIPTION OF CHANGE			DRAWER	ISSUE DATE		
TITLE	0.50QFN4x4-24-A-0.75 POD						
DWG No.	C-OL-167	MATERIAL					
X	±0.5	REV	A	SHEET	1/1	DWN	Cai Zexian 2021/10/06
X.X	±0.1			SCALE	1:1	CKD	
X.XX	±0.05			UNIT	mm	APPD	
X.XXX	±0.050						